


# PROFLEX™ PIB (PERIMETER ISOLATION BARRIER)

## DESCRIPTION

PROFLEX™ Perimeter Isolation Barrier (PIB) is a low density polyethylene foam product. The product serves as a means to assist the installer in maintaining a 1/4" perimeter isolation space along the perimeter of a flooring installation where a change of plane occurs. (Floor to wall).

## TYPICAL USE

The PROFLEX PIB is placed along the wall surface where the flooring installation meets. The PIB may be affixed to the wall using staples or by using a double sided stick tape. Continue with your installation with the PIB in place so a 1/4" perimeter isolation space is maintained along the perimeter. Once your installation is complete, the PIB may be either trimmed away at a point flush with the flooring surface. This method is effective if installing baseboards or cove base. If the perimeter space is left exposed, the PIB may be removed and the space filled with an acoustical sealant, or matching caulk product. **DO NOT FILL IN THE PERIMETER SPACE WITH ANY TYPE OF GROUT OR CEMENTICIOUS PRODUCT.**

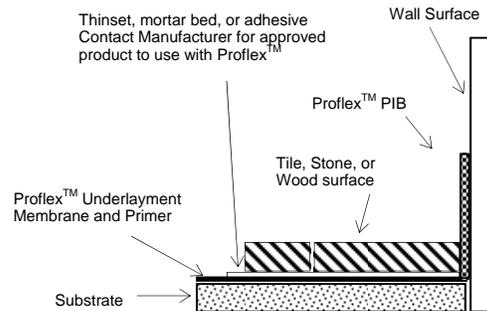

## ADDITIONAL FEATURES AND BENEFITS

- Will aid in the reduction of perimeter flanking noise in sound related applications. (Note: In addition to the perimeter space, the product can be used to reduce perimeter flanking noise under wall studs, contact technical support for additional information)
- Is suitable for use in wood flooring installations.

## PRODUCT COMPOSITION AND PACKAGING

- Low density polyethylene closed cell foam product
- 1/4" X 4" X 125' rolls. 6 rolls per carton

**For further assistance with the use of this product, or any other related installation questions. Please contact our technical support team at 1-877-577-6353.**

PROFLEX PRODUCTS, INC.

Phone: 877-5PROFLEX  
(877-577-6353)  
www.proflex.us

