


1. PRODUCT NAME

PreFormed Seats & Benches

2. MANUFACTURER

PROFLEX® Products, Inc.
1603 Grove Ave
Haines City, FL 33844
Telephone: 863-937-9623
Toll Free: 877-577-6353
Fax: 863-937-9624
Internet: www.proflex.us

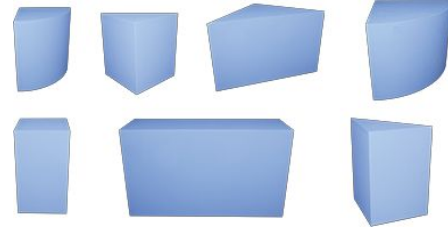

3. PRODUCT DESCRIPTION

PROFLEX® PreFormed Seats and Benches are constructed of lightweight high-density expanded polystyrene and a liquid waterproof membrane finish. PreFormed Seats and Benches are 100% waterproof and ready to tile.

Advantages

- Lightweight and durable
- Factory waterproof seats and benches are guaranteed not to leak
- Approved waterproofing meets ANSI A118.10 requirements
- Ready to tile
- PROFLEX® 15-year deterioration and waterproof warranty

Uses

- Interior and Exterior
- Showers and tub surrounds
- Residential and Commercial

Materials

- Mortar mix for leveling pan area
- ½" x ½" notched trowel
- Polyurethane adhesive/sealant for adhering niche to studs and waterproofing joints
- Modified thinset for setting tile or stone

Suitable Substrates

- Walls: Cement backer board or equal
- Floors: Mud bed or preformed shower pans

PreFormed Seats & Bench Models

Product #	Description
FSOB301	Seat 16" x 16" x 20" Triangle
FSOB302	Seat 23" x 23" x 20" Triangle
FSOB303	Seat 16" x 16" x 20" Convex
FSOB305	Bench 11.5" x 11.5" x 20"
FSOB318	Bench 12" x 12" x 18" Triangle
FSOB306	Bench 11.5" x 35" x 20"
FSOB304	Bench 23" x 23" x 23" Large Convex

Shelf Life

- Factory sealed boxes are guaranteed to be of first quality for five (5) years if stored at temperatures >32°F (0°C) and <100°F (43°C)

Limitations

- Mastics and silicones are never to be used.
- Don't expose to rubber solvents or ketones.
- Don't expose to sun or weather.
- Must be covered with ceramic tile or stone
- Surfaces must be structurally sound, stable and rigid enough to support ceramic/stone tile, thin brick and similar finishes

Caution

Consult SDS for safety information.

4. TECHNICAL DATA

Waterproofing membrane meets ANSI A118.10.

5. INSTALLATION

PREPARATORY WORK

- Shower should be waterproofed in accordance with Tile Council of North America (TCNA) guidelines and all other applicable local codes before installing seat.
- Ensure that walls are square and plumb for proper fit.
- Area where seat is to be installed must be level in order for seat to fit the walls. Use leveling mortar mix in area where seat is to be installed.
- Test fit seat to ensure proper fit against wall area.

INSTALLATION

1. Apply a medium bed, modified thinset to the floor under and walls behind the seat/bench. Use a ½" x ½" notched trowel. On the wall, trowel thinset horizontally.
2. Slide seat/bench in the thinset, flattening the ridges and ensuring complete coverage of thinset.
3. Once seat/bench is installed, use a polyurethane adhesive/sealant on all joints where seat/bench meets the walls. Alternatively apply fiberglass mesh and a liquid waterproofing membrane.
4. If waterproof coating on the PreFormed Seat/Bench is punctured during installation, re-coat the punctured area and 2" (50mm) around the area with two coats of a liquid waterproofing.

Tile Installation Detail

- Install tile using a modified thinset in accordance with the Tile Council of North America (TCNA) guidelines.

6. AVAILABILITY

PROFLEX® Products are available nationwide.

To locate PROFLEX® products in your area, please contact:

Phone: 877-577-6353

Website: www.proflex.us

7. WARRANTY

PROFLEX® Products, Inc. offers a limited warranty for this product when used in accordance with printed specifications. A copy of the limited warranty can be obtained by calling technical services at 877-577-6353 or visiting www.proflex.us

8. MAINTENANCE

None required, but installation performance and durability may depend on properly maintaining products supplied by other manufacturers.

9. TECHNICAL SERVICES

Technical assistance

Information is available by calling the Technical Support

Toll Free: 877-577-6353

Fax: 863-937-9624

Technical and safety literature: To acquire technical and safety literature, please visit our website www.proflex.us

10. FILING SYSTEM

Division 9